




Universal single-wall outlet TOPWET TWJ UNI

BASIC INFORMATION

purpose	drainage of flat roofs (flexible stainless steel base plate)
material	base plate – stainless steel, protective basket – polyamid PA6, pipe – PVC
integrated connection sleeve	BIT – modified bitumen strip SBS
colour	stainless steel / white
load category	H 1,5
certification	EN 1253-2:2015 - Gullies for buildings - Part 2: Roof drains and floor gullies without trap
manufacturer	TOPWET s.r.o., náměstí Viléma Mrštíka 62, 664 81 Ostrovačice, Czech Republic

TECHNICAL PARAMETERS

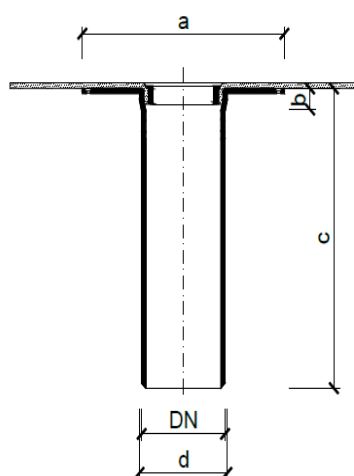

Universal single-wall outlet

Type	DN	Dimensions [mm]			
		a	b	c	d
TWJ UNI 50	50	245	20	400	58
TWJ UNI 75	70	245	20	400	81
TWJ UNI 90	90	245	20	400	96
TWJ UNI 110	100	245	20	400	116
TWJ UNI 125	125	245	20	400	131