


Round gutter spouts TOPWET TWC, TWC x0 and TWC MINI

BASIC INFORMATION

purpose	drainage of flat roofs, terraces and balconies
material	PVC – UV Stabil
Integrated connection sleeve	BIT – modified bitumen strip SBS, PVC – mPVC based foil, TPO – thermoplastic (flexible) polyolefin, EPDM – synthetic rubber foil, PE – polyethylene foil, STE – a sleeve for connecting of waterproofing screed
colour	white
certification	EN 1253-2:2015 - Gullies for buildings - Part 2: Roof drains and floor gullies without trap
manufacturer	TOPWET s.r.o., náměstí Viléma Mrštíka 62, 664 81 Ostrovačice, Czech Republic

TECHNICAL PARAMETERS

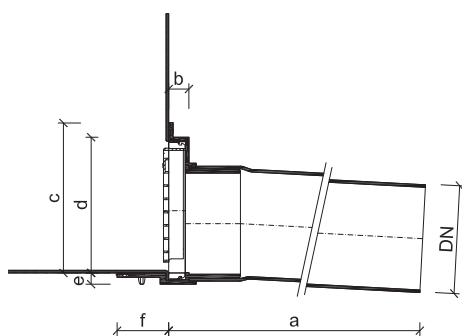

Round gutter spouts

Type	DN	Dimensions [mm]					
		a*	b	c	d	e	f
TWC 50	50	600	24	107	90	13	62
TWC 75	70	600	24	107	90	13	62
TWC 110	100	600	24	174	157	13	60
TWC 125	125	600	24	174	157	13	60
TWC 160	150	600	24	174	157	13	60
TWC 50 x0	50	64	24	107	90	13	62
TWC 75 x0	70	64	24	107	90	13	62
TWC 110 x0	100	84	24	174	157	13	60
TWC 125 x0	125	84	24	174	157	13	60
TWC 160 x0	150	84	24	174	157	13	60
TWC MINI	40	200	-	-	90	13	44

* upon order it is possible to extend up to 1,500 mm