




## Round safety overflows TOPWET TWPP and TWPP MINI

### BASIC INFORMATION

|                              |                                                                                                                                                                                                                 |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| purpose                      | drainage of flat roofs, terraces and balconies                                                                                                                                                                  |
| material                     | polyamide PA6/PVC – UV Stabil                                                                                                                                                                                   |
| Integrated connection sleeve | BIT – modified bitumen strip SBS, PVC – mPVC based foil, TPO – thermoplastic (flexible) polyolefin, EPDM – synthetic rubber foil, PE – polyethylene foil, STE – a sleeve for connecting of waterproofing screed |
| colour                       | white                                                                                                                                                                                                           |
| certification                | EN 1253-2:2015 - Gullies for buildings - Part 2: Roof drains and floor gullies without trap                                                                                                                     |
| manufacturer                 | TOPWET s.r.o., náměstí Viléma Mrštíka 62, 664 81 Ostrovačice, Czech Republic                                                                                                                                    |

### TECHNICAL PARAMETERS

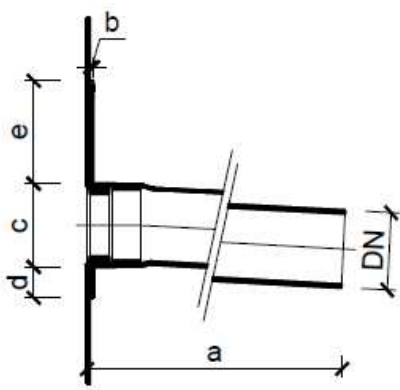

#### Round safety overflows

| Type      | DN  | Dimensions [mm] |    |     |    |    |
|-----------|-----|-----------------|----|-----|----|----|
|           |     | a*              | b  | c   | d  | e  |
| TWPP 50   | 50  | 600             | 20 | 56  | 30 | 97 |
| TWPP 75   | 70  | 600             | 20 | 81  | 30 | 84 |
| TWPP 110  | 100 | 600             | 20 | 116 | 30 | 67 |
| TWPP 125  | 125 | 600             | 20 | 131 | 30 | 59 |
| TWPP MINI | 40  | 200             | 40 | 46  | 2  | 57 |

\* upon order it is possible to extend up to 1,500 mm