


Base plate TOPWET TWOD

BASIC INFORMATION

purpose	airtight entry through the vapour barrier for connecting of TWOP vents and TWP electric and other cable entries
integrated connection sleeve	BIT – modified bitumen strip SBS, PVC – mPVC based foil, TPO – thermoplastic (flexible) polyolefin, EPDM – synthetic rubber foil, PE – polyethylene foil, STE – a sleeve for connecting of waterproofing screed
colour	grey
manufacturer	TOPWET s.r.o., náměstí Viléma Mrštíka 62, 664 81 Ostrovačice, Czech Republic

TECHNICAL PARAMETERS

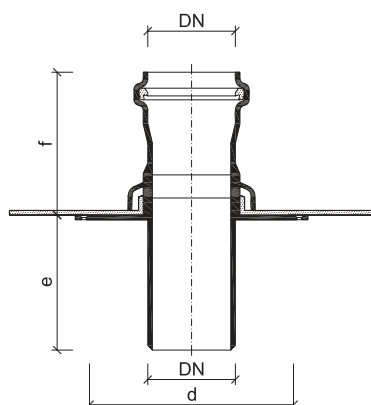

Base plate

Type	DN	Cross section [cm ²]	Dimensions [mm]		
			d	e*	f*
TWOD 50	50	15	250	200	90
TWOD 75	70	37	250	200	90
TWOD 110	100	85	250	200	100
TWOD 125	125	111	250	200	100
TWOD 160	150	181	345	200	125

* upon order it is possible to extend up to 1,000 mm