


Fittings


TOPWET TWUT TPO (FPO)



BASIC INFORMATION

purpose	treatment of entries through the roof membrane from TPO (FPO) based foil
material	TPO (FPO) based foil, with a load-bearing insert, thickness 1.5 mm
colour	by manufacturer of waterproofing
manufacturer	TOPWET s.r.o., náměstí Viléma Mrštíka 62, 664 81 Ostrovačice, Czech Republic

TECHNICAL PARAMETERS

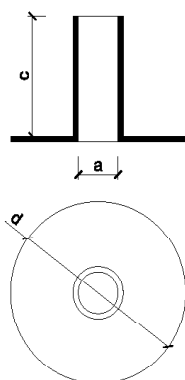

Sealing sleeves - fittings

Type = dimension „a“ [mm]	Dimensions[mm]	
	c	d
TWUT 11, 12, 14, 15, 16, 17, 18, 20 TPO (FPO)	300	200
TWUT 21, 22, 24, 25, 28, 30, 32, 35, 40, 42, 43, 50, 60, 65, 70 TPO (FPO)	300	250
TWUT 75, 80, 90, 100, 110, 120 TPO (FPO)	300	300
TWUT 125, 130, 140, 150, 160, 170 TPO (FPO)	300	350
TWUT 180, 200 TPO (FPO)	300	400

Manufacturer	Order code	Material	Approximate RAL
Bauder	TWUT __ FPO THERMOPLAN GREY	FPO	7001
Bauder	TWUT __ FPO THERMOPLAN PEARL WHITE	FPO	1013
BMI	TWUT __ TPO EVERGUARD WHITE	TPO	9010
BMI	TWUT __ TPO EVERGUARD LIGHT GREY	TPO	7047
Mapei	TWUT __ TPO MAPEPLAN WHITE	TPO	9010
Mapei	TWUT __ TPO MAPEPLAN DARK GREY	TPO	7012
Sika	TWUT __ FPO SARNAFIL GREY	FPO	7040
Sika	TWUT __ TPO SIKAPLAN WHITE	TPO	9010