


- SHINGLE
- SEPARATION LAYER
- HEAT INSULATION XPS
- WATERPROOFING LAYER 2 ASPHALT SHEETS
- HEAT INSULATION
- MOISTURE STOP
- GRADIENT LAYER
- REINFORCED CONCRETE LOAD-BEARING STRUCTURE

TWOK v33-1000
PERFORATED BASKET
FOR ROOFS WITH
SHINGLE

TWN 220 - 500 BIT
ATTACHMENT FOR ROOF
OUTLETS


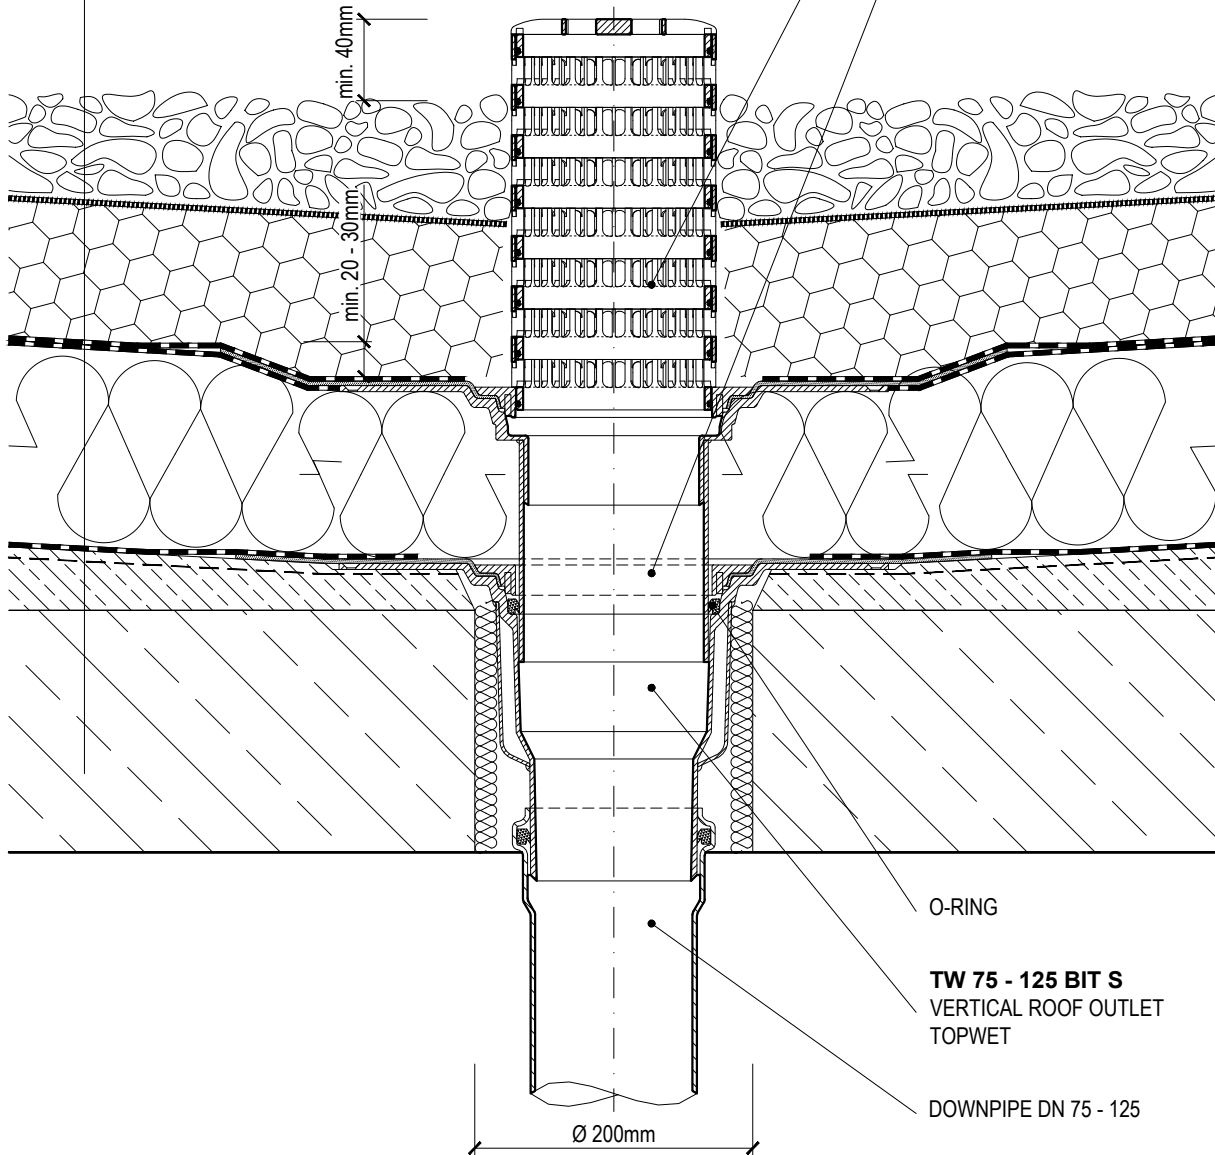


O-RING

TW 75 - 125 BIT S
VERTICAL ROOF OUTLET
TOPWET

DOWNPIPE DN 75 - 125

Ø 200mm

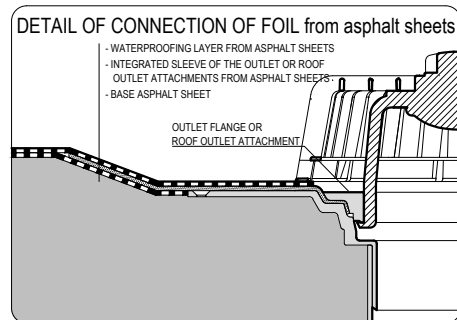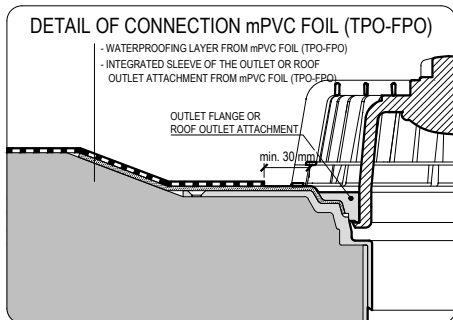

Name **DETAIL OF THE ROOF OUTLET FIT**

Type **SINGLE-DECK HEAT INSULATED NON-WALKABLE ROOF, DUO COMPOSITION**

Construction **REINFORCED CONCRETE**

Components **TW 110 BIT S, TWN 220 BIT, TWOK v240**

Scale **1:5**

TOPWET

SYSTEMS FOR DRAINAGE
OF FLAT ROOFS

info@topwet.cz

www.topwet.cz